

Technical BULLETIN







Erapol EMD750D - A New High Performance Elastomer

Excellence in Polyurethane Chemistry

High Hardness, Excellent Rigidity, Extreme Toughness & Generous Working
Time sums up Era Polymers EMD750D New High Performance Elastomer


EMD750D is a 78 Shore D MDI/PTMEG Polyurethane Elastomer

It has a pot life of 11-14 minutes.

When cast & cured in 80°C moulds the demould time is typically 30 minutes meaning high productivity.

EMD750D is suitable for both machine dispensing and hand casting. The resultant elastomer is not brittle & has excellent physical properties.

Erapol EMD750D is ideal product for applications requiring, thermal resistance, hydrolysis resistance and good mechanical properties.

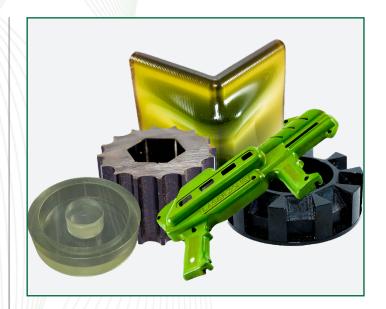

For more information on Erapol EMD750D

Contact Era Polymers:

Telephone: +61 (0) 2 9666 3788.

Email: erapol@erapol.com.au

www.erapol.com.au

Sydney · Adelaide · Brisbane · Melbourne · New Zealand · Singapore · Malaysia · United Kingdom · USA · South Africa